



Series	Description
<b>NI-WRC</b> <i>metric and imperial sizes</i>	Induction hardened and ground stainless steel linear shafts steel grade: X105CrMo17 (W1.4125) / Ø5 - 50 mm / Ø1/4" - 2"

### Steel grades correspondents

EN	Werkstoff	DIN	B.S.	UNI	JIS	GOST	AISI SAE ASTM
X105CrMo17	1.4125	X105CrMo17	-	-	SUS440C	(95Ch18)	440C

### Chemical composition - % by weight

Steel grade	Norm	C	Si	Mn	P	S	Cr	Ni.	Mo	V
X105CrMo17	EN 10088-3	0.95 ÷ 1.20	max. 1.0	max. 1.0	max. 0.040	max. 0.030	16.0 ÷ 18.0	-	0.40 ÷ 0.80	-


### Mechanical properties for steel bars

Steel grade	Diameter Ø mm	Tensile strength R <sub>m</sub> N/mm <sup>2</sup>	Yield strength R <sub>p0.2</sub> N/mm <sup>2</sup>	Elongation A <sub>5</sub> %	Hardness Brinell HB
X105CrMo17+A	5 < Ø ≤ 50	min. 758	min. 448	min. 7	max. 285

*A=annealed*

# Induction Hardened and Ground Stainless Steel Linear Shafts

steel grade: X105CrMo17 (W1.4125)

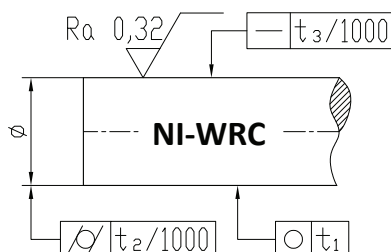

Shaft Diameter $\varnothing$	Weight	Series	Standard length	Surface hardening depth SHD	Roundness (circularity)	Parallelism (cylindricity)	Straightness	Standard tolerance
					t1 max. $\mu\text{m}$	t2 max. $\mu\text{m}$	t3 max. mm/m	
mm	kg/m		mm	mm				ISO h6 $\mu\text{m}$
5	0.15	NI-WRC 5	3000	min. 0.4	4	6	0.25	0 / -8
6	0.22	NI-WRC 6	3000	0.4 + 0.9	4	6	0.25	0 / -8
8	0.39	NI-WRC 8	6000	0.4 + 0.9	4	6	0.20	0 / -9
10	0.62	NI-WRC 10	6000	0.4 + 0.9	4	6	0.20	0 / -9
12	0.89	NI-WRC 12	6000	0.6 + 0.9	5	8	0.20	0 / -11
14	1.21	NI-WRC 14	6000	0.6 + 0.9	5	8	0.20	0 / -11
15	1.39	NI-WRC 15	6000	0.6 + 0.9	5	8	0.20	0 / -11
16	1.58	NI-WRC 16	6000	0.6 + 0.9	5	8	0.20	0 / -11
20	2.46	NI-WRC 20	6000	0.8 + 0.8	6	9	0.20	0 / -13
25	3.85	NI-WRC 25	6000	0.9 + 0.8	6	9	0.15	0 / -13
30	5.55	NI-WRC 30	6000	0.9 + 0.8	6	9	0.15	0 / -13
40	9.86	NI-WRC 40	6000	1.5 + 1.3	7	11	0.15	0 / -16
50	15.41	NI-WRC 50	6000	1.5 + 1.3	7	11	0.15	0 / -16

Shaft Diameter $\varnothing$		Weight	Series	Standard length	Surface hardening depth SHD	Roundness (circularity)	Parallelism (cylindricity)	Straightness	Standard tolerance
mm	inch					t1 max. inch	t2 max. inch	t3 max. in/ft	
		kg/m		inch	inch				Class "L" inch
6.35	1/4	0.25	NI-WRC 6.35	118.11	0.016 + 0.035	0.00016	0.00024	0.00308	-0.0005 / -0.001
9.525	3/8	0.56	NI-WRC 9.525	236.22	0.016 + 0.035	0.00016	0.00024	0.00246	-0.0005 / -0.001
12.7	1/2	0.99	NI-WRC 12.7	236.22	0.024 + 0.035	0.00020	0.00031	0.00246	-0.0005 / -0.001
15.875	5/8	1.55	NI-WRC 15.875	236.22	0.024 + 0.035	0.00020	0.00031	0.00246	-0.0005 / -0.001
19.05	3/4	2.24	NI-WRC 19.05	236.22	0.032 + 0.032	0.00024	0.00035	0.00246	-0.0005 / -0.001
25.4	1	3.98	NI-WRC 25.4	236.22	0.035 + 0.032	0.00024	0.00035	0.00185	-0.0005 / -0.001
31.75	1 1/4	6.21	NI-WRC 31.75	236.22	0.059 + 0.051	0.00028	0.00043	0.00185	-0.0005 / -0.001
38.1	1 1/2	8.94	NI-WRC 38.1	236.22	0.059 + 0.051	0.00028	0.00043	0.00185	-0.0006 / -0.0011
50.8	2	15.90	NI-WRC 50.8	236.22	0.087 + 0.063	0.00028	0.00043	0.00185	-0.0006 / -0.0013

- ✓ Surface hardness: 58±2 HRC
- ✓ Surface roughness: Ra: max. 0.32  $\mu\text{m}$
- ✓ Length tolerance: ±200 mm
- ✓ Surface hardening depth, SHD: according to EN ISO 15787
- ✓ On request: special lengths, tolerances and dimensions
- ✓ Additional chrome plating on request

✓ The hardening depth (SHD according to EN ISO 15787 or Rht according to DIN 6773) is defined as the distance from the steel surface up to the point where the hardness value is 80% of the minimum guaranteed value of the surface hardness and it is established in accordance with ISO 13012, depending on the shaft's size.

✓ The minimum guaranteed value of the surface hardness varies between the steel grade.