

Series	Description
NI-W metric sizes	Induction hardened and ground linear shafts steel grade: Cf53, C55E / \varnothing 4 - 100 mm

Steel grades correspondents

EN	Werkstoff	DIN	B.S.	UNI	JIS	GOST	AISI SAE ASTM
C53	1.1213	Cf53 (C53G)	070M55	C53	S50C	50	1050
C55E	1.1203	Ck55	060A57, 070M55	C55	S55C, S55CM	55	1055
C45E	1.1191	Ck45	080M46	C45	S45C	45	1045
C60E	1.1221	Ck60	060A62, 070M60	C60	S58C	60, 60G, 60GA	1064


Chemical composition - % by weight

Steel grade	Norm	C	Si	Mn	P	S	Cr	Ni.	Mo	V
Cf53	DIN 17212	0.50 ÷ 0.57	0.15 ÷ 0.35	0.40 ÷ 0.70	max. 0.025	max. 0.035	-	-	-	-
C55E	EN 10083-2	0.52 ÷ 0.60	max. 0.4	0.60 ÷ 0.90	max. 0.030	max. 0.035	max. 0.40	max. 0.40	max. 0.1	-
C45E	EN 10083-2	0.42 ÷ 0.50	max. 0.4	0.50 ÷ 0.80	max. 0.030	max. 0.035	max. 0.40	max. 0.40	max. 0.1	-
C60E	EN 10083-2	0.57 ÷ 0.65	max. 0.4	0.60 ÷ 0.90	max. 0.030	max. 0.035	max. 0.40	max. 0.40	max. 0.1	-

Mechanical properties for steel bars

Steel grade	Diameter \varnothing mm	Tensile strength R_m N/mm ²	Yield strength $R_{p0.2}$ N/mm ²	Elongation A_5 %	Hardness Brinell HB
Cf53+N	$\varnothing \leq 16$	610 - 760	min. 340	min. 16	min. 183
	$16 < \varnothing \leq 100$	610 - 760	min. 340	min. 16	-
C55E+N	$\varnothing \leq 16$	min. 680	min. 370	min. 11	min. 208
	$16 < \varnothing \leq 100$	min. 640	min. 330	min. 12	min. 198
C45E+N	$\varnothing \leq 16$	min. 620	min. 340	min. 14	min. 190
	$16 < \varnothing \leq 100$	min. 580	min. 305	min. 16	min. 172
C60E+N	$\varnothing \leq 16$	min. 710	min. 380	min. 10	min. 218
	$16 < \varnothing \leq 100$	min. 670	min. 340	min. 11	min. 203

N=normalized

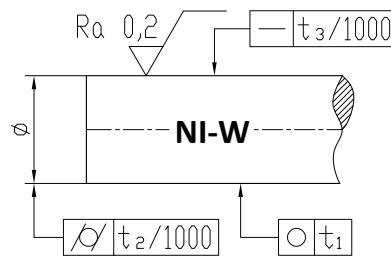

Shaft Diameter \varnothing	Weight	Series	Standard length	Hardening depth SHD	Roundness (circularity)		Parallelism (cylindricity)		Straightness	Standard tolerance ISO h6
					t1 max.	t2 max.	t3 max.			
mm	kg/m		mm	min. mm	μm	μm	μm	mm/m	μm	
4	0.10	NI-W 4	4000	0.4	4	6	0.30	0 / -8		
5	0.15	NI-W 5	4000	0.4	4	6	0.25	0 / -8		
6	0.22	NI-W 6	6000	0.4	4	6	0.25	0 / -8		
8	0.39	NI-W 8	6000	0.4	4	6	0.20	0 / -9		
10	0.62	NI-W 10	6000	0.4	4	6	0.20	0 / -9		
12	0.89	NI-W 12	6000	0.6	5	8	0.20	0 / -11		
14	1.21	NI-W 14	6000	0.6	5	8	0.20	0 / -11		
15	1.39	NI-W 15	6000	0.6	5	8	0.20	0 / -11		
16	1.58	NI-W 16	6000	0.6	5	8	0.20	0 / -11		
20	2.46	NI-W 20	6000	0.9	6	9	0.20	0 / -13		
25	3.85	NI-W 25	6000	0.9	6	9	0.15	0 / -13		
30	5.55	NI-W 30	6000	0.9	6	9	0.15	0 / -13		
35	7.55	NI-W 35	6000	1.5	7	11	0.15	0 / -16		
40	9.86	NI-W 40	6000	1.5	7	11	0.15	0 / -16		
45	12.48	NI-W 45	6000	1.5	7	11	0.15	0 / -16		
50	15.41	NI-W 50	6000	1.5	7	11	0.15	0 / -16		
60	22.20	NI-W 60	6000	2.2	8	13	0.15	0 / -19		
70	30.20	NI-W 70	6000	2.2	8	13	0.15	0 / -19		
80	39.44	NI-W 80	6000	2.2	8	13	0.15	0 / -19		
90	49.92	NI-W 90	6000	3.2	10	15	0.15	0 / -22		
100	61.62	NI-W 100	6000	3.2	10	15	0.15	0 / -22		

- ✓ Surface hardness: 62±2 HRC
- ✓ Surface roughness: Ra: max. 0.20 μm
- ✓ Length tolerance: ±200 mm
- ✓ Steel grades: Cf53, C55E, alternative C45E, C60E
- ✓ Hardening depth, SHD: according to EN ISO 15787
- ✓ On request: special lengths, tolerances and dimensions

- ✓ The hardening depth (SHD according to EN ISO 15787 or Rht according to DIN 6773) is defined as the distance from the steel surface up to the point where the hardness value is 80% of minimum guaranteed value of the surface hardness and is established in accordance with ISO 13012, depending on shaft's size.

- ✓ Approximately 75 mm of both shaft ends are not guaranteed to be either in diameter tolerance or in the standard hardness values.